


**SIMPLICITY REDUCES COSTS,  
LINKAGE FREE, NO CONTACTING PARTS, AUTOMATIC  
CALIBRATION AND TUNING AND AVAILABLE EX-STOCK**

**INTRODUCING THE FISHER DVC 2000 -AC**


Digital Control ensures that time in the field is **'MINUTES'** not **'HOURS'** Improving Safety for both Plant and Personnel.

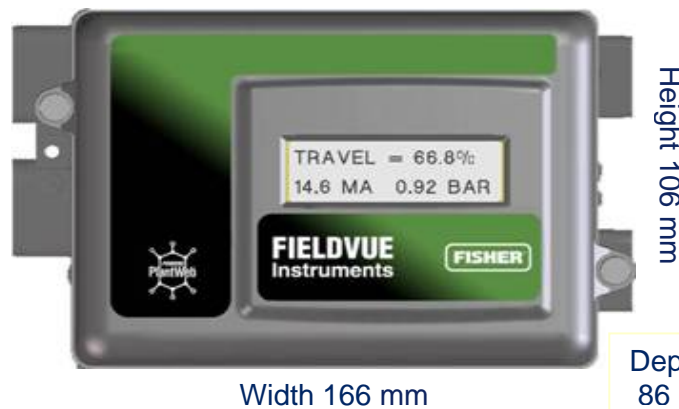

With push buttons for menu navigation and a liquid crystal display

**DVC 2000 - Auto Calibration (AC) Specification**

Available configurations	Linear (sliding stem), rotary or integrally mounted to the Design GX control valve.
Input signal	4-20mA dc nominal, split ranging available, \minimum 8.5 Volts available at the instrument (9.0 Volts for HART communication).
Output signal	Up to 95% of supply pressure, max 100 psi (7 bar)
Transmitter	4-20mA dc output, isolated
Limit switches	1 or 4mA dc output, isolated; independently configurable throughout full travel range.
Enclosure	Meets NEMA 4X, IEC 60529

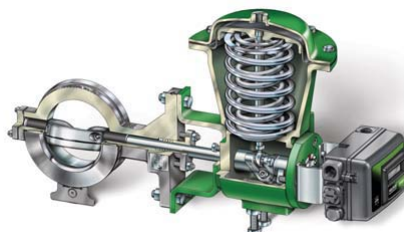

Price per DVC 2000-AC including mounting kit, using magnetic array 4-20 mA position feed-back, complete with two limit switches: **£654.28**

Contact MCE Group plc (Fisher Authorised Distribution Centre)  
Hurricane Court, Concorde Way, Preston Farm Business Park,  
Stockton-on-Tees, TS18 3TL Tel: 01642 882211, Fax: 01642  
882233, E-Mail: [mce@mceplc.com](mailto:mce@mceplc.com) Website: [www.mceplc.com](http://www.mceplc.com)